


MH 2M

Compactness, ease of storage, reliability
and low running costs

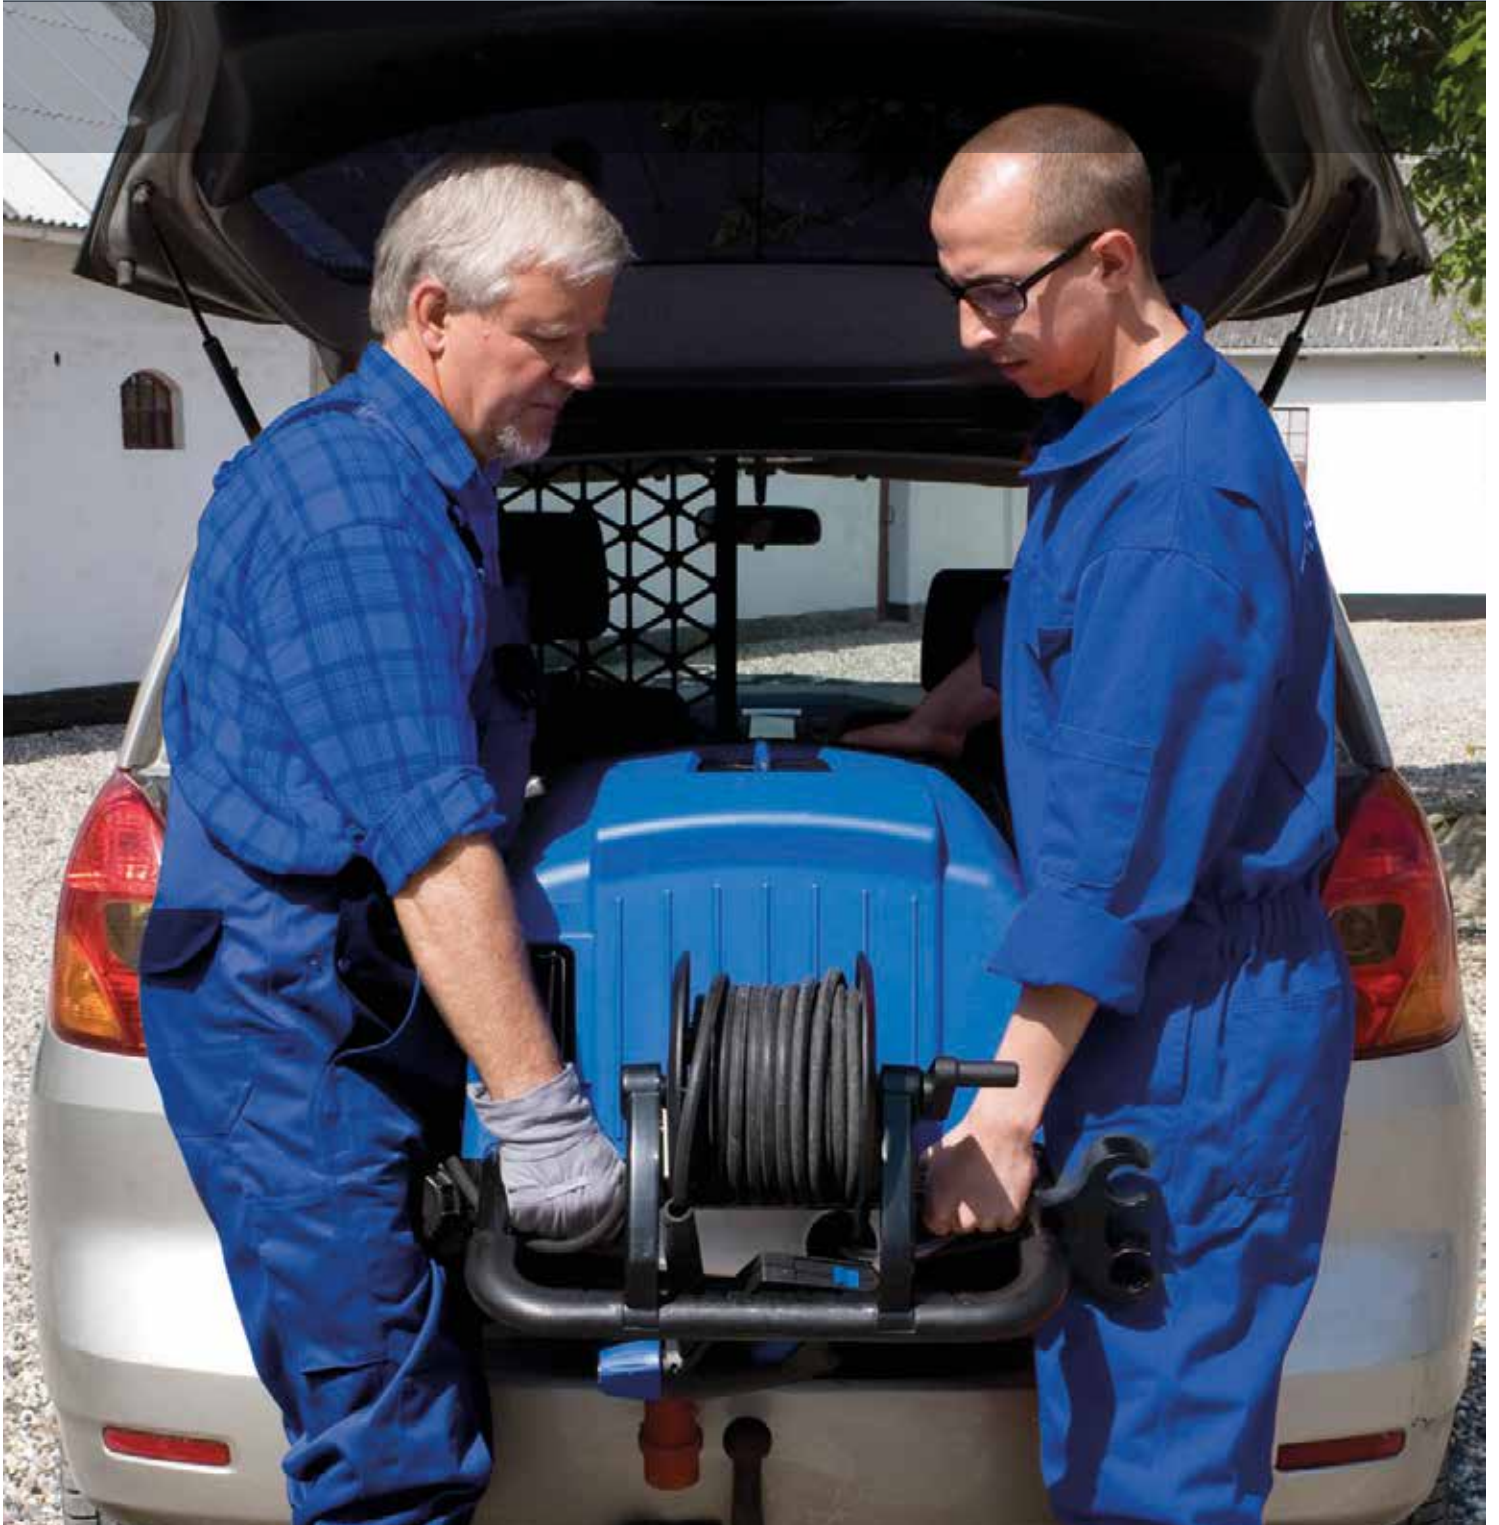

The good level of serviceability also reduces maintenance cost and thus, overall cost of cleaning.

- EcoPower boiler with >92% efficiency and reduced fuel cost
- 1450 rpm motor pump unit with ceramic piston pump
- Delayed start stop function
- Robust steel frame
- Compact, vertical design reducing storage footprint
- Easy to use control panel... all controls in one place

- Ergonomic accessory system
- Machine protection against through low fuel safety, exhaust gas sensor, flame sensor
- Duo Motor system
- High pressure detergent with removable detergent tank
- Max. inlet temperature 40°C



TECHNICAL SPECIFICATIONS

Description	MH 2M-140/600 X	MH 2M-155/660 X
Item no.	107145025	107145027
Pump pressure (bar/MPa)	140/14	155/15.5
Cleaning impact (kg/force)	2.6	3.0
Water flow Qmax/Qiec (l/h)	600/560	660/600
Pump (RPM)	1450	2800
Water temperature (water/steam) (°C)	80	80
Max inlet temperature (°C)	40	40
Fuel consumption $\Delta T=45^{\circ}\text{C}$ (kg/h)	2.5	2.7
Fuel tank (l)	17	17
Length x width x height (mm)	607x688x1071	607x688x1071
Weight (kg)	99	99
Power consumption (kW)	3.4	3.8
Voltage/phase/frequency/current (V/~/HZ/A)	230/1/50/14.5	400/3/50/8
Detergent tank (l)	5	5
Ceramic pistons	3	3
El cable (m)	5	5
Nozzle size	.0350	.0350
Features:		
Detergent tank	•	•
EcoPower boiler-high efficiency	•	•
Hose reel	•	•
Service indicator	•	•
Brass cylinder head	•	•
Automatic on/off and delayed action	•	•
Flame sensor	•	•
Standard equipment:		
Ergo Coupling Kit	101119496	101119496
Gardena Male 3/4"	106404529	106404529
HP Hose DN6 15 m for HW and Swivel	101117763	101117763
Ergo 2000 Standard w. Hose Swivel	106403122	106403122
Universal Plus Lance 940 Bend w/o nozzle	106403036	106403036
Nozzle 0350 Indication Ring Bordeaux	101119736	101119736